

Spectrometer **Exemplar® Plus**

High Performance Smart Spectrometer



The Exemplar® Plus is a high performance smart spectrometer utilizing a low stray light unfolded Czerny-Turner spectrograph. It features a highly sensitive TE Cooled back-thinned (BT) CCD detector which is linearly summed for high dynamic range. Its long focal length, coupled with a high quantum efficiency detector, provides superior data quality over the entire 190-1100nm spectral range. The Exemplar Plus features a high signal to noise ratio, making it ideal for low light level applications, and also features a built-in shutter allowing for dark scan measurements, even while illuminated. As a member of the Exemplar product line, it features on board data processing and USB 3.0 communication. The Exemplar product line is also optimized for multi-channel operation featuring ultra-low trigger delay and gate jitter.

The Exemplar Plus has spectral configurations from 190nm to 1100nm and resolutions between 0.1 nm and 10.0 nm. Custom configurations are available for OEM applications.

SMART:

On-board processing including averaging, smoothing, and dark compensation

SPEED:

“SuperSpeed” USB 3.0 communication



SYNCHRONOUS:

Supports up to 32 devices with ultra-low trigger delay (14ns) & gate jitter (+/- 1ns)

SIGNAL TO NOISE RATIO:	
On-board Averaging 1	~540
On-board Averaging 10	~1900
On-board Averaging 100	~4800

Applications:

- Low Light Level UV to NIR Spectroscopy
- Raman and Fluorescence Spectroscopy
- On-line Process Monitoring
- LCD Display Measurement
- BioMedical Spectroscopy
- Gas and Water Analysis
- LED Characterization

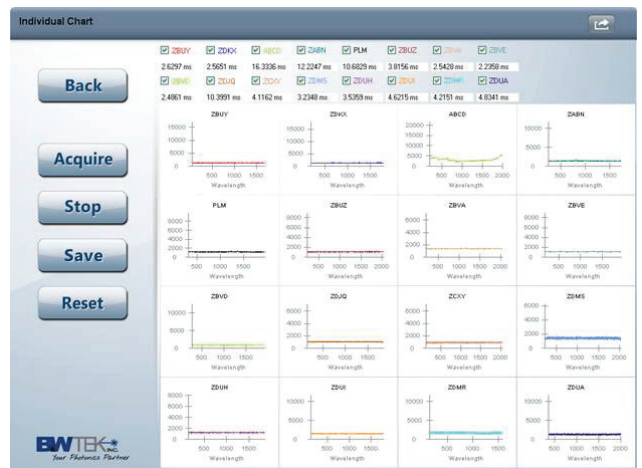

Specifications:


Power Input	5VDC@6A (Maximum at Startup) 5VDC@2.5A (Typical at Normal Operation)
Detector Type	Back-thinned CCD Array
Wavelength Range	190nm - 1100nm
Pixel Number	2048 Effective Detector Elements
Effective Pixel Size	14µm x ~ 0.9mm
Spectrograph f/#	3.6
Spectrograph Optical Layout	Standard Czerny-Turner
Dynamic Range	50,000 (Typical)
Digitizer Resolution	16-bit or 65,535:1
Integration Time	6ms, Adjustable in 1µs Increments
Aux Port	External Trigger, 4 Digital Outputs (2 with Shutter Control), 2 Digital Inputs, Analog Input, Analog Output and System Reset
Operating Temperature	5°C - 35°C
Operational Relative Humidity	85% Noncondensing
CCD Cooling	Default: 0°C at Ambient of 25°C.
Weight	3.6 lbs
Dimensions	7.40in x 5.05in x 2.80in (188mm x 128mm x 71mm)
Computer Interface	USB 3.0 / 2.0 / 1.1
Operating Systems	Windows: XP, Vista, 7 (32-bit & 64-bit)

Additional Features:

- High UV, Vis, and NIR Response
- 2048 Detector Elements
- Over 60% QE at 200nm
- 0° TE Cooling (Default)
- Over 90% Peak QE
- Built-in Shutter

Software:

BWSpec™ is a spectral data acquisition software with a wide range of tools that are designed to perform complex measurements and calculations at the click of a button. It allows the user to choose between multiple data formats and offers optimization of scanning parameters, such as integration time. In addition to powerful data acquisition and data processing, other features include automatic dark removal, spectrum smoothing, and manual/auto baseline correction.



Entrance Slit

Slit Option	Dimensions	Approx. Resolution 350 - 750nm
10µm	10µm wide x 1mm high	Call
25µm	25µm wide x 1mm high	~1.8nm
50µm	50µm wide x 1mm high	~2.9nm
100µm	100µm wide x 1mm high	~4.5nm
200µm	200µm wide x 1mm high	Call

Custom Slit Widths Available

Diffraction Grating

Best Efficiency	Spectral Coverage (nm)	Grating
Vis / NIR	350-1050	400/550
NIR	750-1050	1000/900
UV- NIR	190-1100	300/280
UV	190-380	1500/250

Custom Configurations Available

Accessories:

- Fiber Sampling Probes
- Fiber Sample Holders
- Fiber Patch Cords
- Light Sources

Spectrograph

